

**Wireless  
Analog Molded Case  
Electric Clocks**



**GENERAL INFORMATION**

- Clock hour and minute hands: .... Black
- Clock second hand: ..... Red
- Power: ..... 120vac or 24vac, 50/60 Hz  
Continues operating for up to 1 hour during power outage
- Input voltage range ..... 120vac/240vac (110v to 240v)  
24vac (15v to 30v)
- Current draw:..... 5mA (120vac)  
3mA (240vac)  
>80mA (24vac)
- Remote receiver: ..... Option for rooms shielded from radio frequencies, such as hospital X-ray rooms  
This option uses common RJ11 jacks to terminate both ends of 50 foot cable (included) separating the receiver unit from the clock
- Plug: ..... 120vac - 10A, 125v 2-prong plug, 6 ft. cord  
24vac - 4 position Molex®
- Rear panel indicator: ..... Red LED indicates receiver is synchronizing to master time  
Green LED indicates power applied
- Receiver sensitivity: ..... 10uV per meter
- Antenna type: ..... External
- Time to synchronize: ..... Initial sync time is 5-10 minutes
- Time accuracy: ..... ±1 second to SiteSync IQ® System Controller
- Reset button: ..... Press for 5 seconds to force time sync
- Warranty: ..... Five Years

**PHYSICAL / ENVIRONMENTAL SPECIFICATIONS**

- Operating temperature: ..... 41°F to 131°F
- Storage temperature: ..... 41°F to 131°F
- Relative humidity: ..... 0% - 95% Non-condensing

**Note:** These clocks are intended for use with a SiteSync IQ® Wireless Clock System.

## ORDERING INFORMATION

Part # w/Molex	Description
SQ46BAAD304	10" Round, Surface, 120vac
SQ46BABD304	10" Round, Surface, 24vac
SQ45BAAD?04	10" Round, Flush, 120vac
SQ45BABD?04	10" Round, Flush, 24vac
SQ56BAAD304	12" Round, Surface, 120vac
SQ56BABD304	12" Round, Surface, 24vac
SQ55BAAD?04	12" Round, Flush, 120vac
SQ55BABD?04	12" Round, Flush, 24vac
SQ66BAAD304	15" Round, Surface, 120vac
SQ66BABD304	15" Round, Surface, 24vac
SQ65BAAD?04	15" Round, Flush, 120vac
SQ65BABD?04	15" Round, Flush, 24vac
SQ92BAAD204	12" Round, double dial ceiling mount, 120vac
SQ92BABD204	12" Round, double dial ceiling mount, 24vac
SQ93BAAD204	12" Round, double dial wall mount, 120vac
SQ93BABD204	12" Round, double dial wall mount, 24vac
SQ62BAAD204	15" Round, double dial ceiling mount, 120vac
SQ62BABD204	15" Round, double dial ceiling mount, 24vac
SQ63BAAD204	15" Round, double dial wall mount, 120vac
SQ63BABD204	15" Round, double dial wall mount, 24vac

### Note:


If flush mounting, replace the ? in the part number with the number from the list below that will correspond with the system you're replacing. New flush mount installations require backboxes.

**0 = Faraday    1 = National    5 = Simplex®    6 = Cincinnati/Edwards    7 = 2-hook    8 = Setco**

**Other dial styles and case colors available.**

**Note:** Personalized dial option available. Add L to the end of the Part #.


SIZE	OUTSIDE DIMENSIONS		
	A	B	C
<b>Surface</b>			
10"	10 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>2</sub> "	N/A
12"	13 <sup>1</sup> / <sub>4</sub> "	2 <sup>1</sup> / <sub>2</sub> "	N/A
15"	16"	2 <sup>1</sup> / <sub>2</sub> "	N/A
<b>Flush</b>			
10"	9 <sup>7</sup> / <sub>8</sub> "	1 <sup>3</sup> / <sub>8</sub> "	N/A
12"	13 <sup>1</sup> / <sub>4</sub> "	2"	N/A
15"	16"	2"	N/A
<b>Double Dial</b>			
12"	13 <sup>1</sup> / <sub>4</sub> "	15"	8 <sup>5</sup> / <sub>8</sub> "
15"	16"	19 <sup>1</sup> / <sub>4</sub> "	8 <sup>5</sup> / <sub>8</sub> "

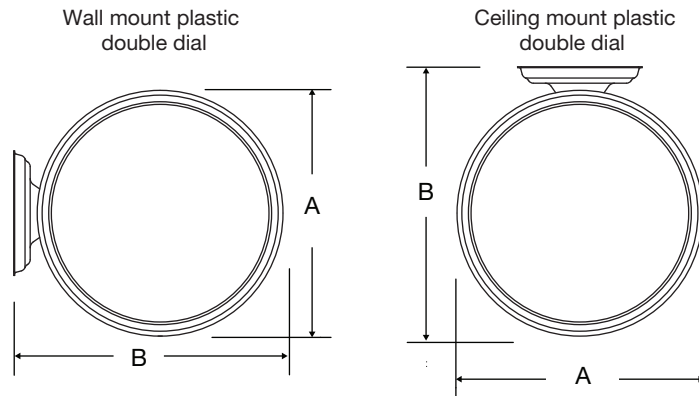


Flush mount plastic



Surface mount plastic

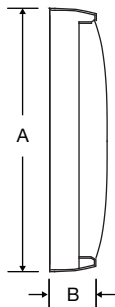

Plastic double dial profile



At American Time, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application. © American Time