



FEATURES

- **2 Year Warranty**
- Wireless control manually or on a schedule using a SiteSync IQ System Controller or Remote Transmitter
- Keyhole slots on back of enclosure for easy mounting
- Includes 10 high-intensity LED's
- Siren has up to 32 user selectable tones
- Siren volume is user selectable between 85dB or 100dB
- Standard lens color is white (amber, blue, green and red also available)


GENERAL DESCRIPTION

The **american time™** Wireless Strobe is an indoor device triggered wirelessly by the SiteSync IQ System Controller. This Wireless Strobe is triggered by programmed events in the system controller, on demand using the MAN button on the system controller or with the Circuit tab of the Remote Connect web interface (using a SiteSync IQ System Controller with the Ethernet option and a computer with internet access).

Each Wireless Strobe is factory set to one of the wired signal circuit relays in the system controller. The part number will indicate which circuit of the system controller the strobe is configured to (i.e. H004580W-1 is set to circuit 1; H004580W-2 is set to circuit 2).

Part Number Description

H004580W-1 = Wireless strobe with white lens for circuit 1





■ **Note:** White lens standard

SPECIFICATIONS

- Dimensions:** 10"h x 7"w x 5.5"d
- Weight:** 2.5 lbs.
- Power options:** 120vac/240vac, 0.07A, 50-60 Hz (hard wired)
- Operating temperature:** 14° to 140°F (-10°-60°C)
- Humidity:** 0%-95% Non-condensing
- Strobe volume:** 85 dB Or 100 dB (user selectable)
- Receiver frequency:** 450-470 MHz (factory set)
- Paging frequency:** POCSAG, narrow band
- Data baud rate:** 512 BPS
- Receiver sensitivity:** 10uVM
- Channel spacing:** 12.5 KHz

Mounting

The Wireless Indoor Strobe is easily mounted to a wall using the six keyhole openings on the back of the enclosure.

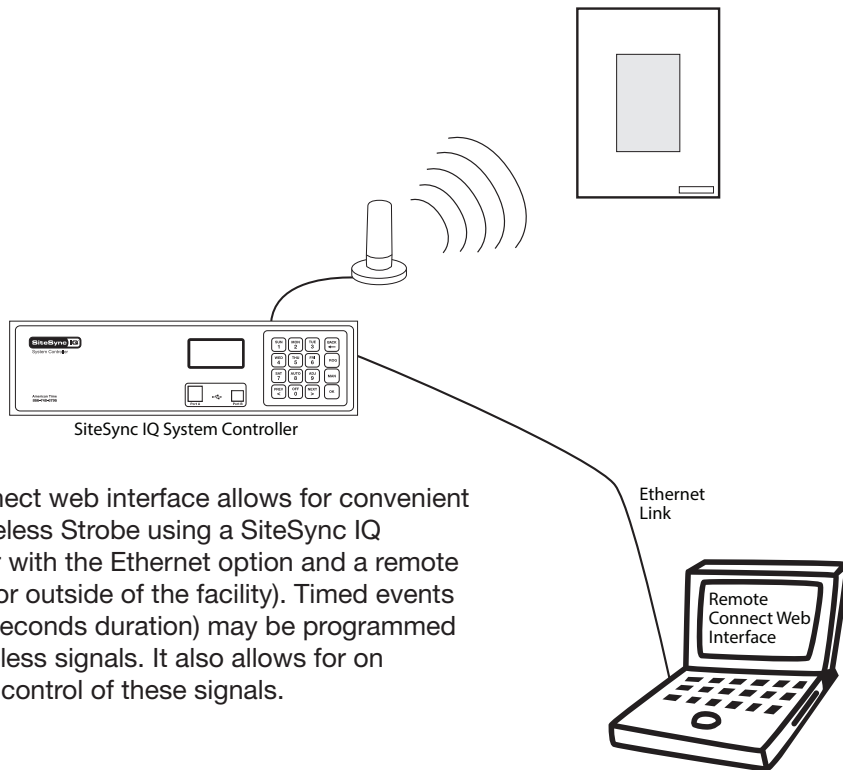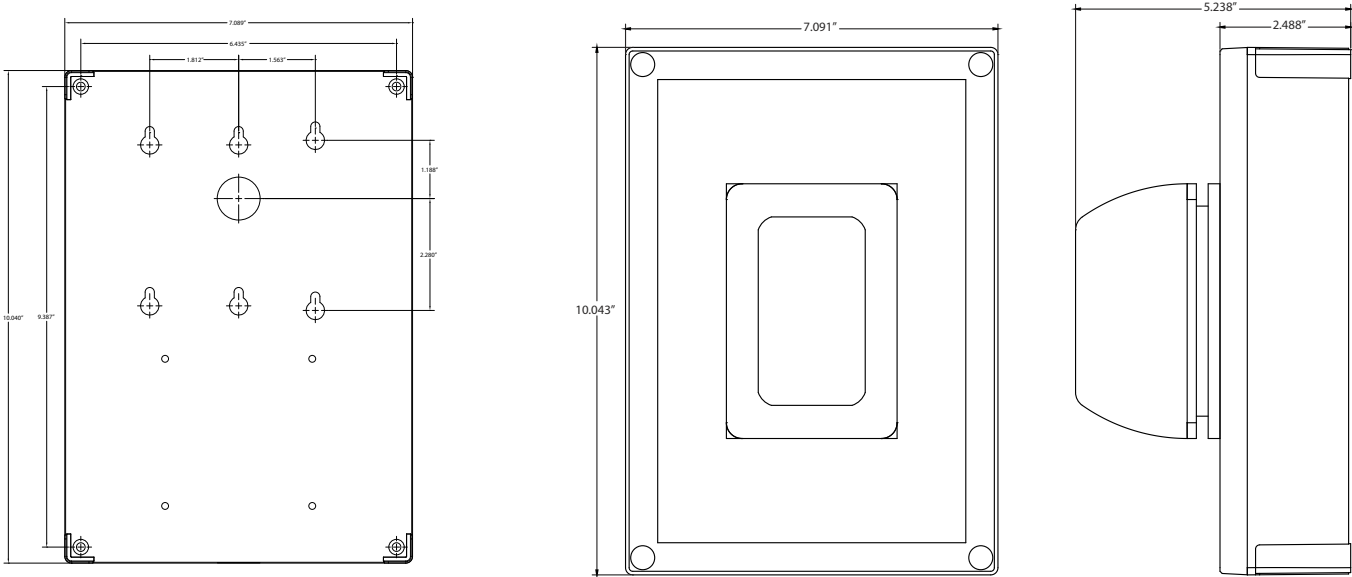

The Remote Connect web interface allows for convenient control of the Wireless Strobe using a SiteSync IQ System Controller with the Ethernet option and a remote computer (inside or outside of the facility). Timed events (ON, OFF or 1-9 seconds duration) may be programmed for wired and wireless signals. It also allows for on demand (manual) control of these signals.

At American Time, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application. © American Time