

More than just an IP speaker.

The EverAlert Speaker makes it easy to keep people informed and ensures your message will be heard, especially in outdoor spaces, high-traffic areas needing greater volume, or for locations that don't require the visual interface of the Dynamic Display or Dynamic View.

The high-intelligibility EverAlert Speaker is controlled on the inCloud Management Portal and can be individually targeted or zoned into groups for message assignment or scheduling like other EverAlert devices.

Provides all EverAlert audio functionality, including:

- Alarms
- Weather alerts
- Audio messaging
- Bell and Event tones
- EverAlert Live paging

Whether as part of a larger EverAlert system with visual displays or as a powerful stand-alone audio messaging system, the EverAlert Speaker does what other IP speakers do -- and then some.



Part Numbers:

EverAlert Interior Speaker Kit: EASPKINT-KIT2


EverAlert Exterior Speaker Kit: EASPKEXT-KIT

Kit includes Speaker Controller, interior or exterior speaker, 15' speaker cable (16AWG plenum-rated) for remote speaker installation, and 1-year inCloud subscription.

Specifications

Speaker Controller

- Weight: 4.50 lbs
- Dimensions: 8"H x 12"W x 1.5"D
- Power Requirements: PoE+ (30W)
- Output Wattage: 10W
- Wired LAN Connectivity: 10/100M, RJ45 Connector
- Management: inCloud Management Portal
- Operating temperature: 32 - 104° F (not outdoor-rated)
- Relative humidity: 85% maximum, non-condensing
- Speaker Capacity: Single interior or exterior EverAlert speaker
- Compliance: FCC Part 15, ICES-003, RoHS

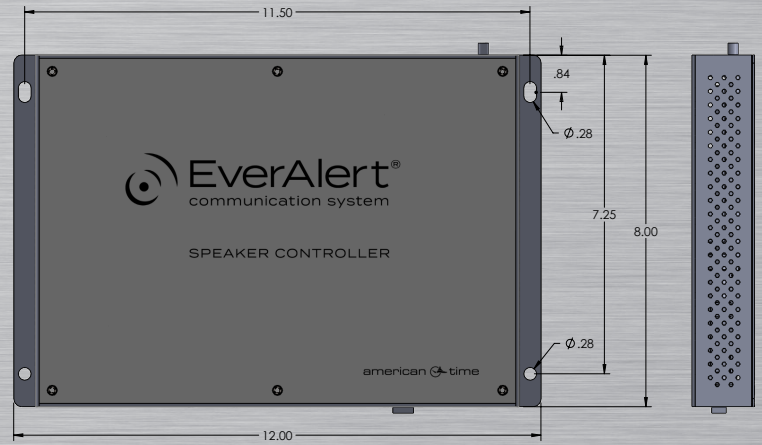

Interior Speaker

- Weight: 2.25 lbs
- Dimensions: 8" diameter x 2.85"D
- Cutout diameter: 7.15"
- Grille diameter: 12.875"
- Max range from Controller: 15'
- Power source: EverAlert Speaker Controller
- Enclosure: 20ga zinc-plated steel, indoor only
- Frequency response: 54Hz-11.6kHz (+6dB); 50Hz-20kHz (±6.6dB)



Exterior Speaker

- Weight: 3.85 lbs
- Dimensions: 5"H x 5"W x 4"D
- Max range from Controller: 15'
- Power source: EverAlert Speaker Controller
- Enclosure: 304 stainless steel, outdoor-rated
- (Note: Speaker Controller must be mounted indoors; only exterior speaker is outdoor-rated)
- Frequency response: 500Hz - 7kHz

