



PoE Analog Wood Case Clocks

Power over Ethernet (PoE) is a recognized standard (IEEE802.3af) for delivering power over an Ethernet cable. PoE uses a single CAT5 or higher Ethernet patch cable to provide both power and synchronization signals, which saves on installation costs and maintenance. Clocks are provisioned and monitored through the inCloud Management Portal. It is recommended that an un-interruptible Power Supply (UPS) be part of the Ethernet network system to maintain clock function during a power outage.

FEATURES

- 3 Year Warranty
- Supports up to 10 SNTP servers for redundancy
- Supports DHCP or static IP addressing
- Easy initial mounting and setup
- Support for any time zone
- Automatic Daylight Saving Time adjustment

SPECIFICATIONS

Clock hour & minute hands	Black
Clock second hand	Red
Clock case	Wood (2 options)
Clock crystal	Polycarbonate
Power consumption	PoE, IEEE802.3af compliant, 1W, 48v
Operating Temperature	32 °F to 104 °F (0 °C to 40 °C)
Operating Humidity	95% maximum, non-condensing
Time accuracy	±1 second to SNTP time server
Warranty	3 Years

CERTIFICATIONS

- Electromagnetic Emissions
 - EN 55032:2012/AC:2013 Class B
 - FCC 15.107:2018 Class B
 - FCC 15.109:2018 Class B
 - ICES-003:2016 Class B
- Electromagnetic Immunity
 - EN 55024:2010
- Safety
 - CB



Light Oak



Mahogany


ORDERING INFORMATION

Part #	Description
PE55LGPDP304	12" light oak, surface mount
PE55MGPD304	12" mahogany, surface mount
PE65LGPDP304	15" light oak, surface mount
PE65MGPD304	15" mahogany, surface mount

Note: Personalized dial option available. Add L to the end of the part number. PoE clocks are factory set to your time zone. Please specify when placing an order. Call for details.

Accessories

TL-POE160S	Single port, PoE+ injector from TP-Link
H001141	Tamper-resistant security bracket, for 12" wood case surface mount
H004734	Tamper-resistant security bracket, for 15" wood case surface mount
H004167B-POE	USB Drive with Network Clock Connect Software

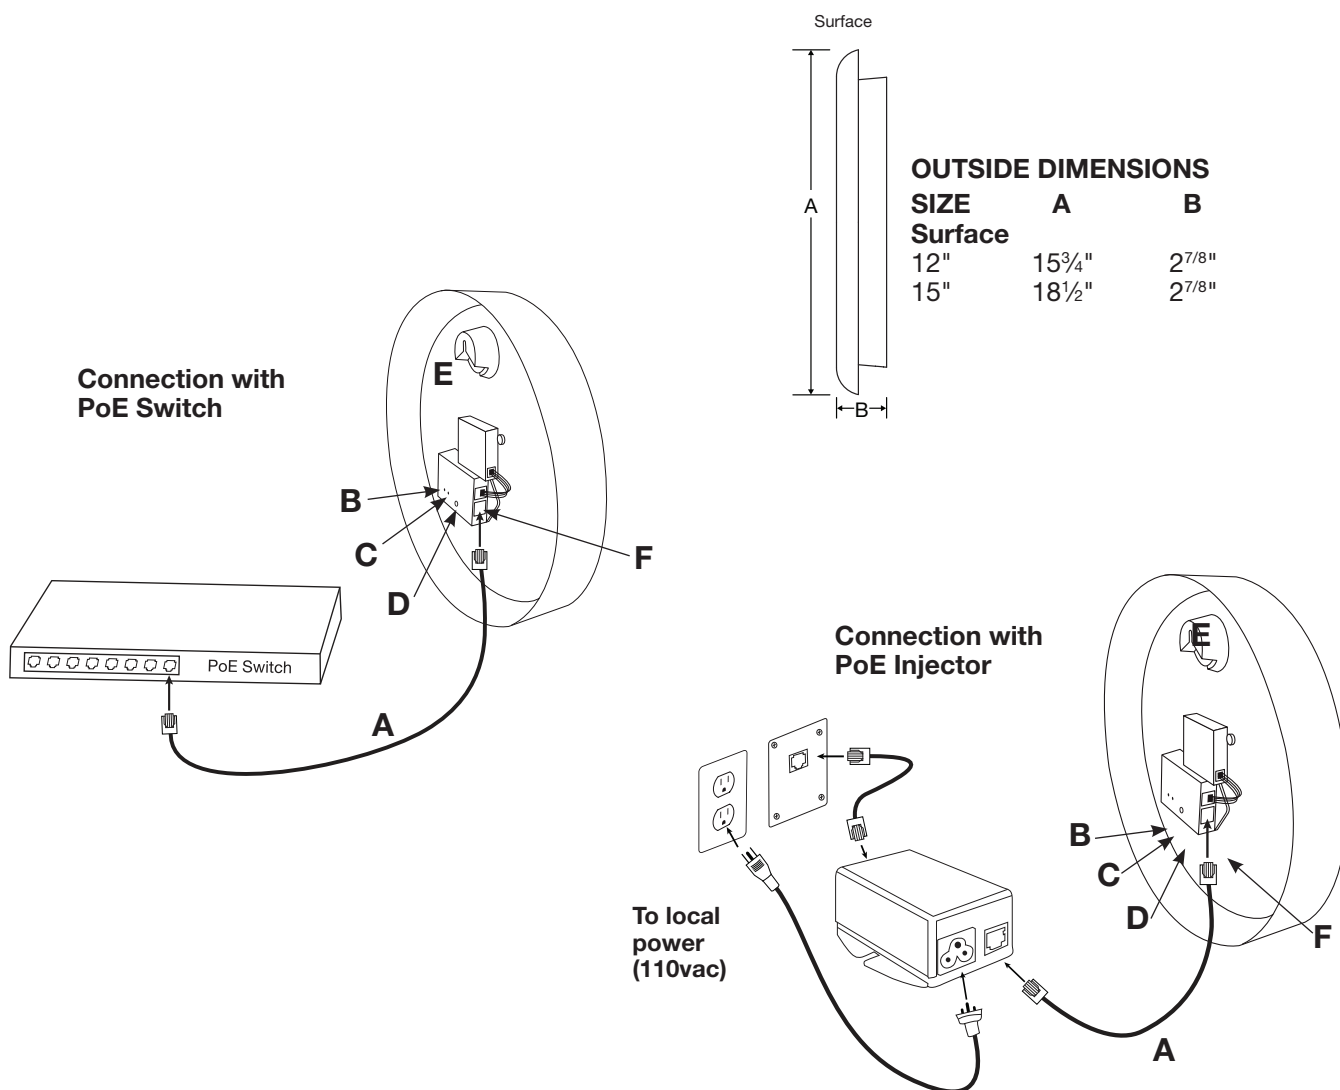

A=PoE connection (CAT 5 or higher Ethernet patch cable-included)
E=Keyhole Hanger F=PoE Receiver

B=Status LED C=Relay LED D=Default Button

At American Time, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application.

© American Time