




# Replacement for Synchronous-Wired 60th Minute Motor Movement

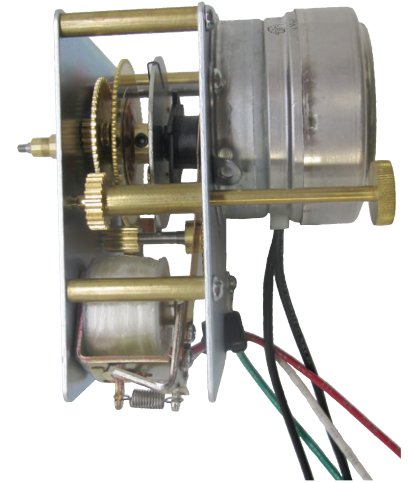

This corrective movement performs a 12 hour correction twice daily at 6:00:00 with a 25 or 27 minute correction pulse from the system master clock. It performs an hourly correction at HH:00:00 (top of each hour) with a 25 second signal from the system master clock. Replacement movements are supplied with hands for a 12" clock which should be set at 6:00.

## FEATURES

- Complete with correction coil
- Set hands at 6:00 when replacing
- Includes hands for a 12" dial

## SPECIFICATIONS

### Operating Voltage

120VAC	60 Hz	motor = .033 amps	Correction coil = .022 amps
24VAC	60 Hz	motor = .144 amps	Correction coil = .094 amps

## ORDERING INFORMATION

Part #	Hands included	Voltage
N1279110	for 12"	120VAC
N127911015	for 15"	120VAC
N127911018	for 18"	120VAC
N127924	for 12"	24VAC

At American Time, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application.

© American Time