

System Specifications

The EverAlert Speaker makes it easy to keep people informed and ensures your message will be heard, especially in outdoor spaces, high-traffic areas needing greater volume, or for locations that don't require the visual interface of the Dynamic Display or Dynamic View. The high-intelligibility EverAlert Speaker is controlled on the inCloud Management Portal and can be individually targeted or zoned into groups for message assignment or scheduling like other EverAlert devices.

Provides all EverAlert audio functionality, including:

- Alarms
- Weather alerts
- Audio messaging
- Bell and Event tones
- EverAlert Live paging

Whether as part of a larger EverAlert system with visual displays or as a powerful stand-alone audio messaging system, the EverAlert Speaker does what other IP speakers do -- and then some.

EverAlert Interior Speaker Kit (Part Number: EASPKINT-KIT2)

Contents

- EverAlert Speaker Controller
- 8-inch interior speaker (12-inch grille)
- 15' speaker wire (16AWG, plenum-rated)
- Speaker grille mounting screws
- Spade connectors



EverAlert Exterior Speaker Kit (Part Number: EASPKEXT-KIT)


Contents

- EverAlert Speaker Controller
- Outdoor-rated speaker w/ stainless steel enclosure
- 15' speaker wire (16AWG, plenum-rated)






EverAlert Speaker Controller

Weight	4.50lbs
Dimensions	8"H x 12"W x 1.5"D
Power Requirements	PoE+ (30W)
Output Wattage	10W
Wired LAN Connectivity	10/100M, RJ45 Connector
Operating Temperature	32-104° F (not outdoor-rated)
Relative Humidity	85% maximum, non-condensing
Speaker Capacity	Single interior or exterior EverAlert speaker
Compliance	FCC Part 15, ICES-003, RoHS
Management	inCloud Management Portal

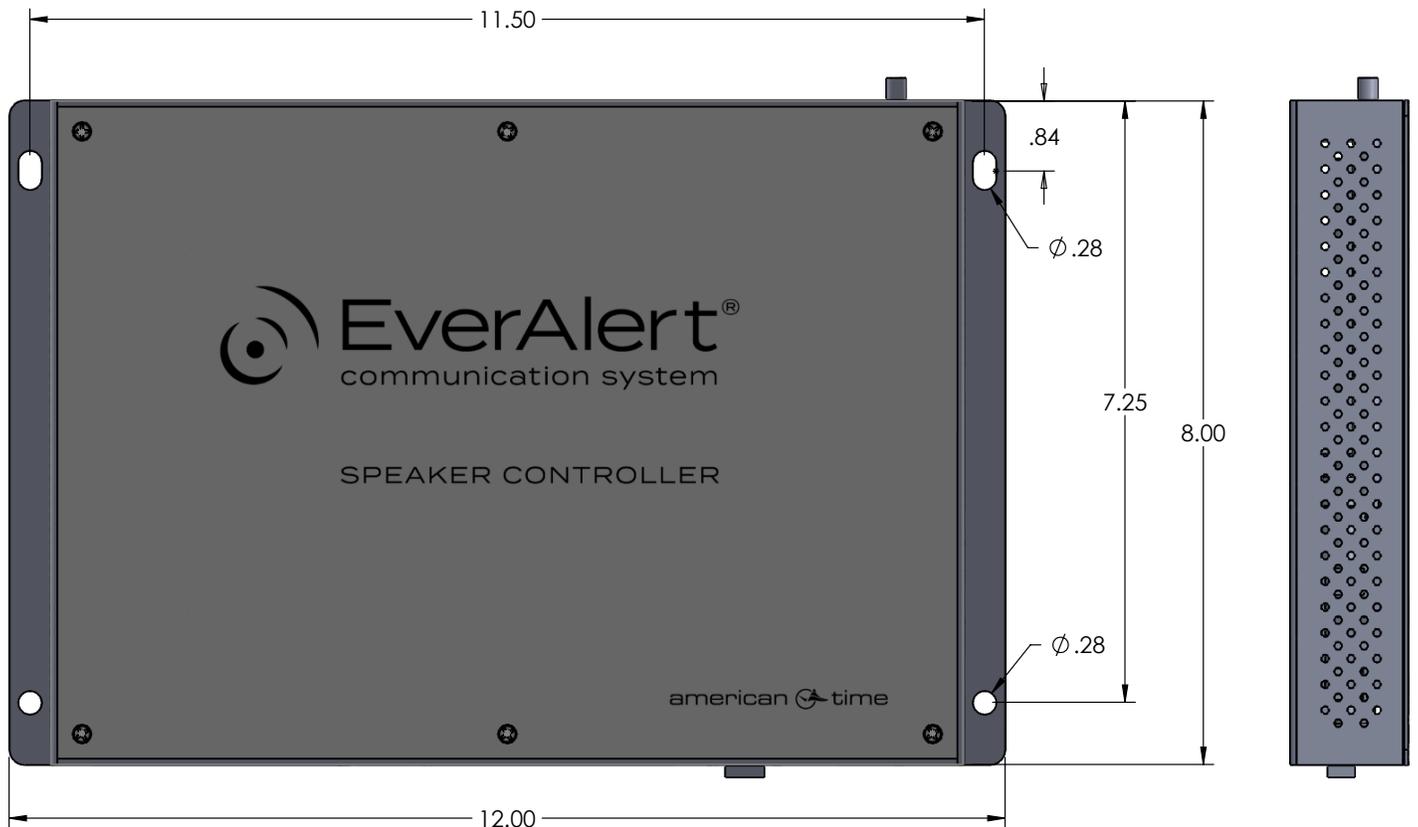


Interior Speaker

Weight	2.25lbs
Dimensions	8" diameter x 2.85"D
Cutout Diameter	7.15"
Grille Diameter	12.875"
Max Range	15' from EverAlert Speaker Controller (Note: Extending wiring beyond 15 feet may result in performance issues or potential damage.)
Power Source	EverAlert Speaker Controller
Enclosure	20ga zinc-plated steel (not outdoor-rated)
Frequency Response	54Hz-11.6kHz (+/- 6dB); 50Hz-20kHz (+/- 6.6dB)

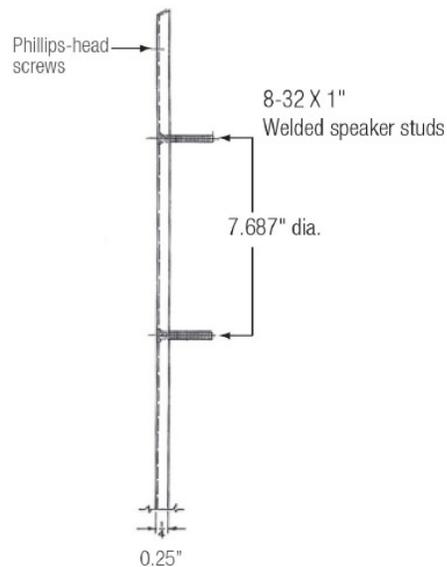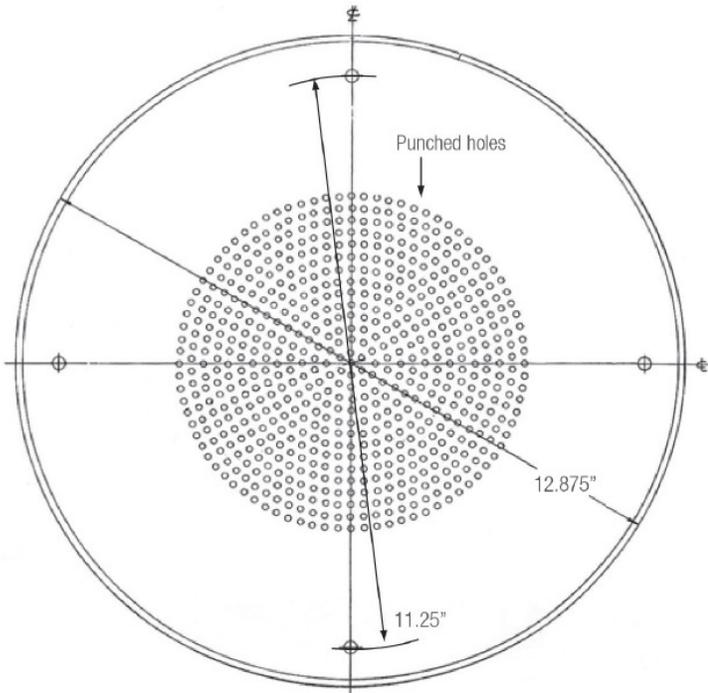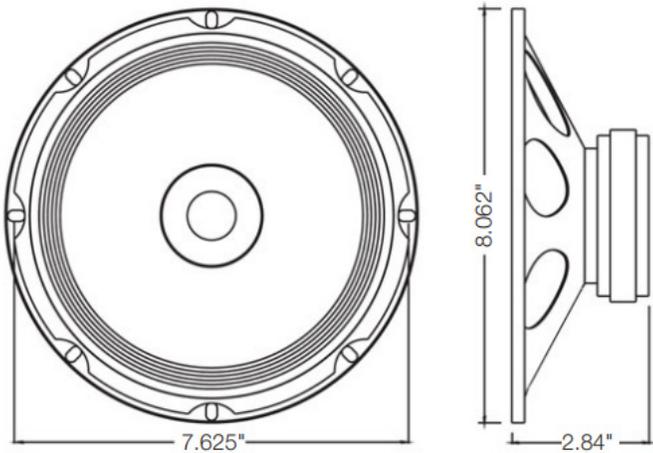

Exterior Speaker

Weight	3.85lbs
Dimensions	5"H x 5"W x 4"D
Max Range	15' from EverAlert Speaker Controller (Note: Extending wiring beyond 15 feet may result in performance issues or potential damage.)
Power Source	EverAlert Speaker Controller
Enclosure	304 stainless steel, outdoor-rated (Note: Speaker Controller must be mounted indoors; only exterior speaker is outdoor-rated)
Frequency Response	500Hz-7kHz

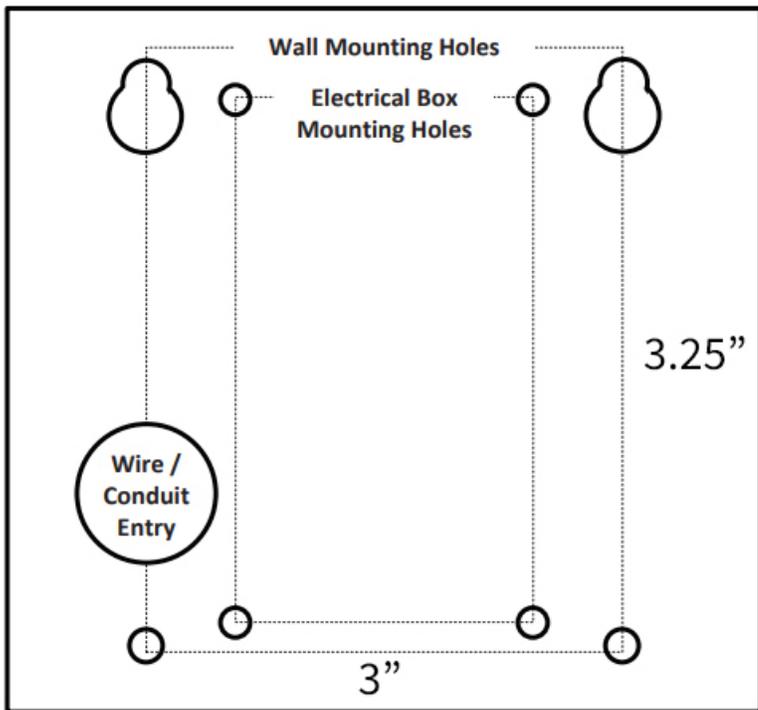

Accessories



Surface Mount Baffle (Part Number: DSQ-8)



Steel Enclosure with Planished Knockout for 8-inch Speaker, Recessed (Part Number: 8XD4-P)



Tile Bridge for 8-inch Speaker (Part Number: LBS8-R1)