

FEATURES


- 1 Year Warranty
- High torque outdoor movement
- Face diameter up to 48"
- Wired remote reset switches available

GENERAL

American Time® Glo Dial clock movements are especially designed for outdoor operation and will keep correct time under all weather conditions. Precision-cut gears, slow-turning shafts and lubricants assure long maintenance-free operation. Motors used on Glo Dial movements are designed to carry a greater load than required and need no heaters or fans for extreme weather. Balanced hands come complete with hubs.

DESCRIPTION

American Time® Glo Dial movements are a high torque movement capable of running hands for a dial diameter up to 48". Glo Dial movements come in either a long (4 1/2") or short (2 1/4") shaft length to meet customer needs. Wired remote reset switches enable customers to fast advance the clock for time setting or to stop the clock for any reason. Reset switches are available for indoor or outdoor applications. Glo Dial movements are supplied with a heavy-duty galvanized backbox 6 3/8"h x 6 3/8"w x 3 1/4"d.

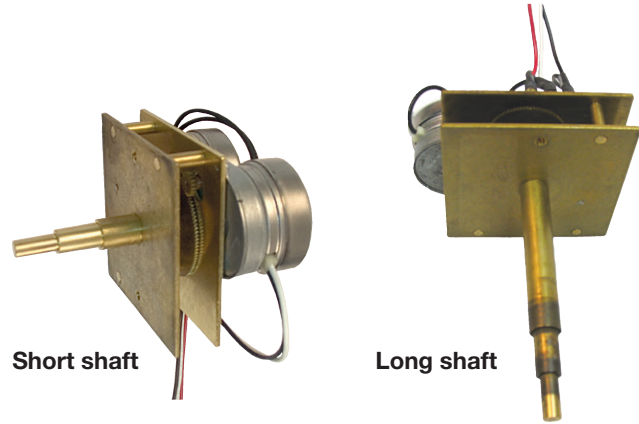

ORDERING INFORMATION

Model # Description

Model #	Description
N12930	Manual reset-short shaft
N12932	Manual reset-long shaft
N12931	Remote reset-short shaft
N12933	Remote reset-long shaft

Note: Available in 220v, 50hz. Add **220V50** to the end of the Model #.

Accessories

CRS12901	Outdoor reset switch
CRS970	Indoor reset switch
H000107	Indoor keyed reset switch



CRS12901




CRS970



H000107

Hands		A	B	C	D
CH911	18" minute hand	8 3/4"	2 1/16"	1 1/2"	1 3/16"
CH910	18" hour hand	6 3/4"			
CH913	24" minute hand	10 7/8"	3 1/4"	2"	1 3/16"
CH914	24" hour hand	7 1/4"			
CH919	30" minute hand	14"	4 1/4"	2 1/4"	1"
CH918	30" hour hand	10 1/2"			
CH923	36" minute hand	16 3/8"	4 3/4"	2 3/4"	1 3/4"
CH922	36" hour hand	10 7/8"			
CH927	48" minute hand	21 7/8"	6 1/4"	3 3/4"	1 7/8"
CH926	48" hour hand	14 9/16"			
CJ2900	Hub kit (required if making your own hands)				

Note: If making hands, maximum combined hand weight may not exceed 19.9 oz.

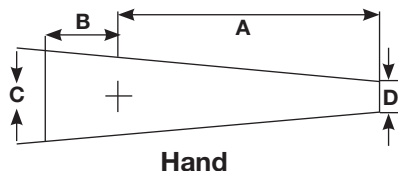

SPECIFICATIONS

Run Motor: 120vac, 60 Hz, 3 watt, .034 amps, 1 rpm
Torque - 15"/lb. +10/-5/lbs.

Reset Motor: 120vac, 60 Hz, 6 watts, .089 amps, 2 rpm

Reset Switches:

CRS12901

Max Switch Current: 15 amps at 120/24vac
Waterproof box and covers
Amber reset light

CRS970

Max Switch Current: 10 amps at 120vac
SPDT run/off/reset switch
Red reset light

H000107

Max Switch Current: 3 amps at 120vac
SPDT run/off/reset switch
Removable keyed switch

