


## Replacement for Standard™ Electric Dual-Motor Synchronous–Wired Motor Movement

### FEATURES

- Set hands at 6:00 when replacing
- Includes hands for a 12" dial

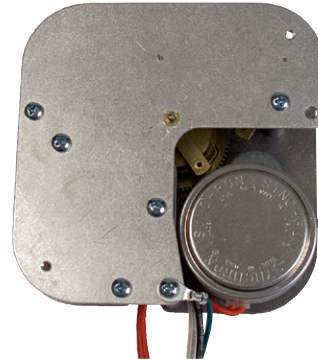

### DESCRIPTION

This dual-motored corrective movement performs a 12 hour correction twice daily with a 15 minute correction pulse sent by the system master clock at 5:12:00. The run motor power is connected during the 12-hour correction. A 29-second signal is applied to the correction motor line from XX:59:30 to XX:59:59 to cause hourly corrections. During hourly corrections, power is disconnected from the run motor. Replacement movements are supplied with hands for a 12" clock which should be set at 6:00.

### ORDERING INFORMATION

Part #	Description
N109410110	120vac
N10941024	24vac

### SPECIFICATIONS

#### Average Power Consumption

24vac	7.54 watts
120vac	8.32 watts

#### Run Motor

24vac	60 Hz	1 rpm	.144 amps
120vac	60 Hz	1 rpm	.033 amps

#### Reset Motor

24vac	60 Hz	60 rpm	.286 amps
120vac	60 Hz	60 rpm	.070 amps

At American Time, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application.

© American Time